



Adjusting the Fimec Router Motor height

Slacken 6 screws
(by approximately 1 turn)
with M5 allen key

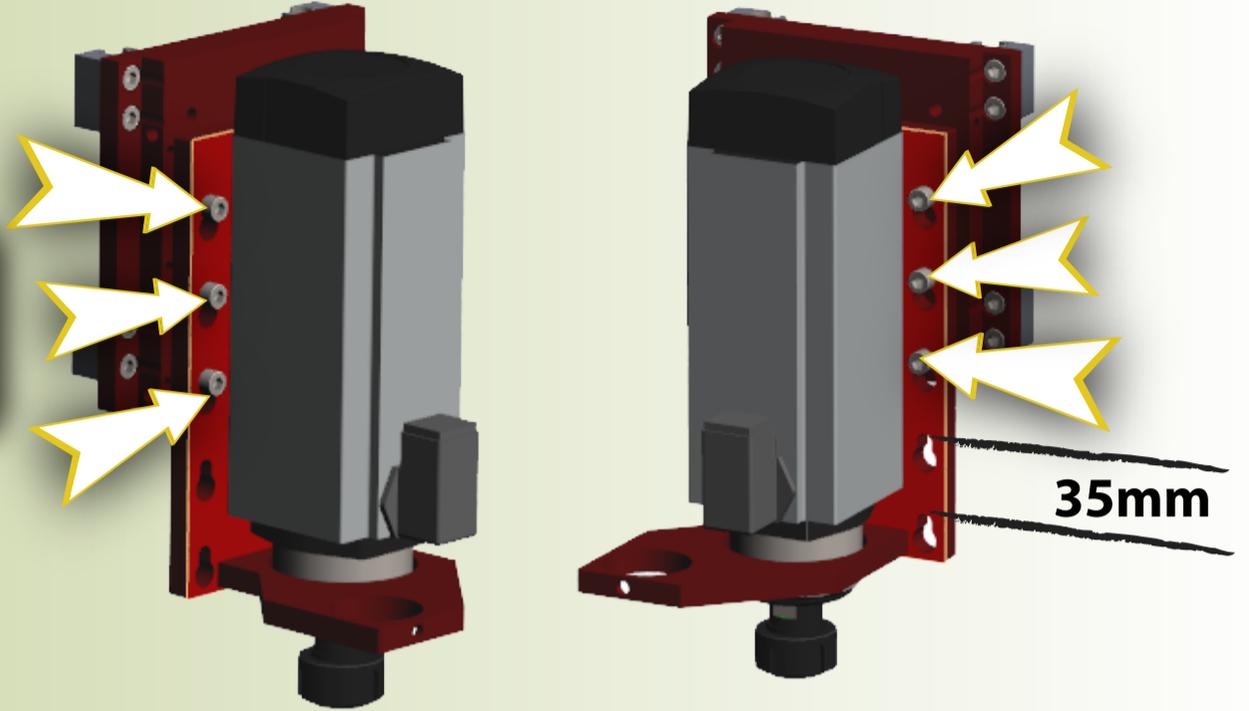

Lift motor & backplate
UP, then OUT.

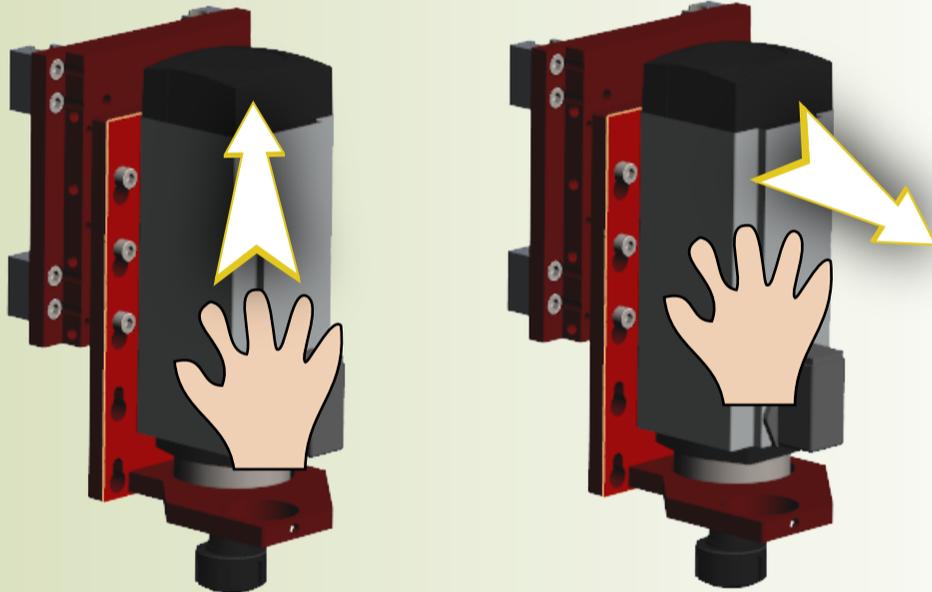

Re-fit in required position.
Make sure backplate has sat
down fully onto the screws.
Tighten the 6 screws

