



Adjusting the Porter Cable Router Motor height

Remove the 6 screws with M5 allen key

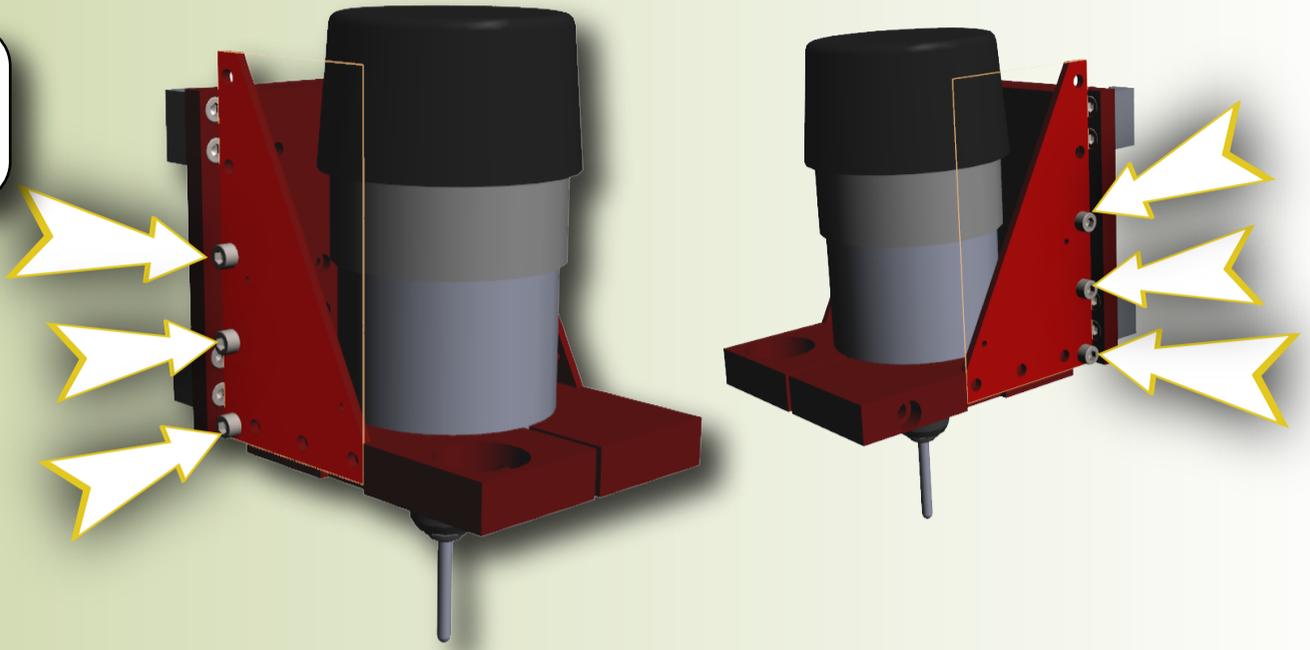

Slide motor and mounting plate up or down until inline with required set of holes (at 35mm increments)

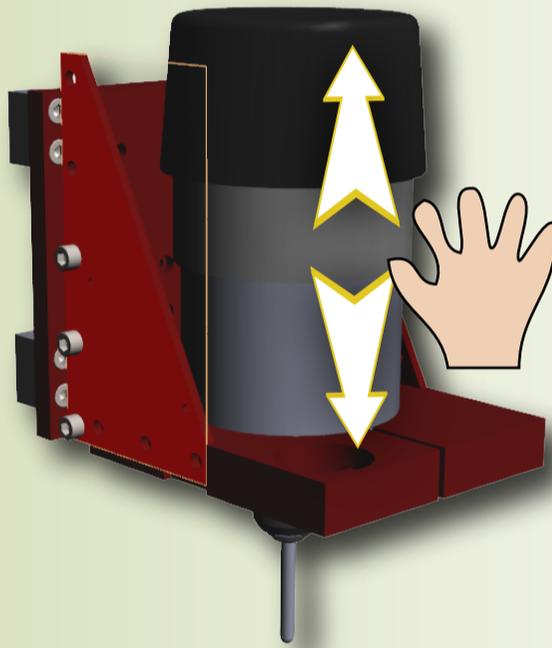

Re-fit and tighten the 6 screws

